


# SINGLE BATTERY CHARGER

# SCDS



- For DS Series Battery only
- Designed with features including status indicators, secure DC-in Fischer connector, and BVA protection

# SINGLE BATTERY CHARGER SCDS

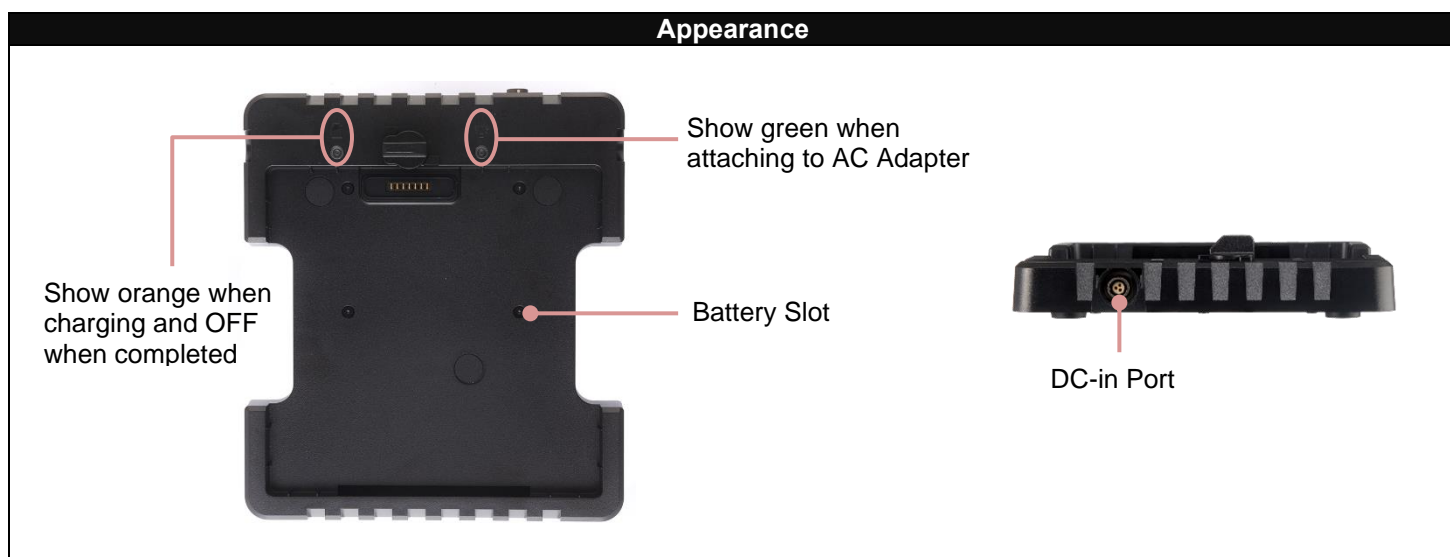

## Features

LED Indicators and Charging Ports	
<b>Power Indicator</b>	– Green (When attaching to AC Adapter)
<b>Charge Indicator</b>	– Orange/OFF (Charging/Completed)
<b>Battery Slot</b>	– Battery Charging Slot x 1 – DS Standard Battery – DS Double-Capacity Battery

Electronic characteristics (DC Input)	
<b>DC Input Range</b>	– 12 ~ 32V with BVA
<b>Charging Time</b>	– 3 hours (Standard Battery) – 5 hours (Double Capacity Battery)

Physical Characteristics	
<b>Dimension</b>	– 180 (L) x 160 (W) x 35 (H) mm
<b>Weight</b>	– 321 g

Environmental Ratings and Certifications	
<b>Battery Charging Temperature</b>	– +10°C ~ +45°C
<b>Storage Temperature</b>	– -40°C ~ +70°C
<b>Certifications</b>	– CE – FCC