


MULTI BATTERY CHARGER

MCDK



- For DK Series Battery only
- Designed for charging 3 batteries (2 primary and 1 secondary), independently.

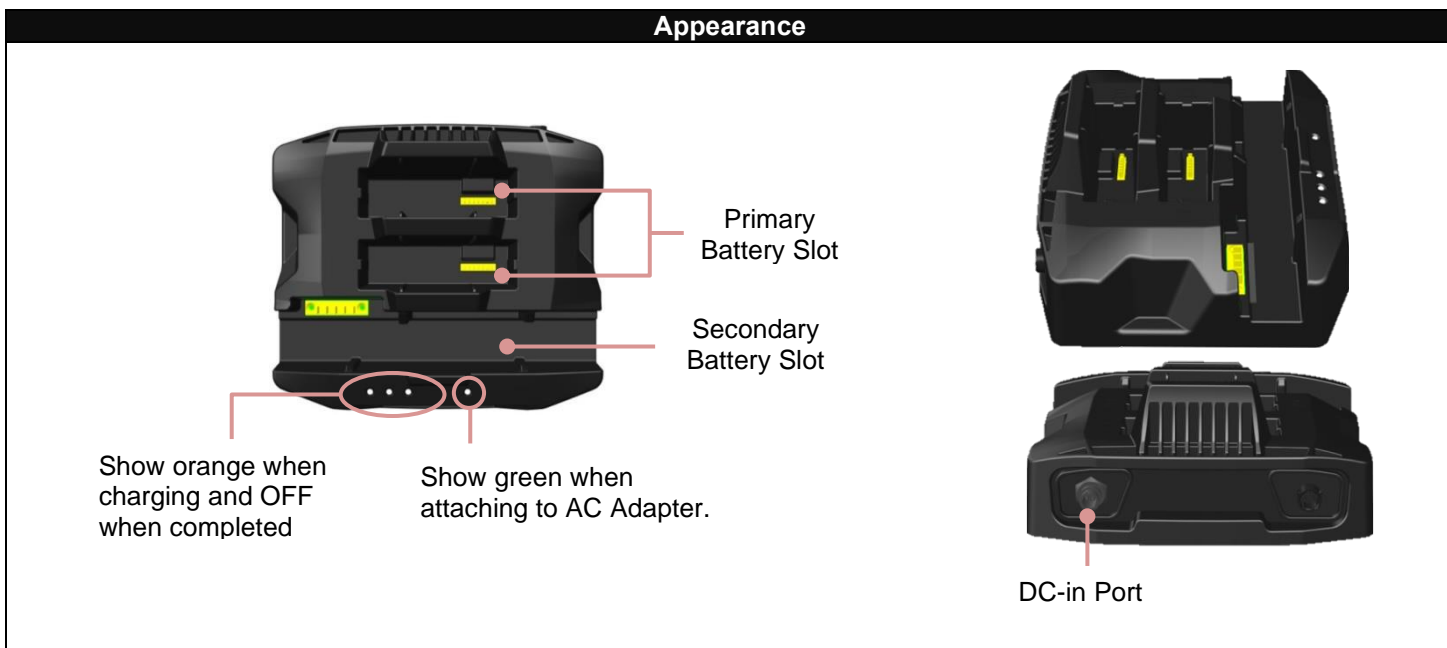

Features

LED Indicators and Charging Ports

Power Indicator	- Green (When attaching to AC Adapter)
Charge Indicator	- Orange/OFF (Charging/Completed)
Battery Slot	- Battery Charging Ports x 4 (Primary x 2 and Secondary x 1) - Applicable Batteries: Battery pack for DK Series

Electronic characteristics (DC Input)

DC Input Range	- 12 ~ 32V with BVA
Charging Time	- Primary battery x1 : 5 hrs - Secondary battery x1 : 7 hrs - Primary battery x1 + Secondary battery x1 : 5~6 hrs - Primary battery x2 + Secondary battery x1 : 7~8 hrs (Each slot is independent, charging time won't accumulate.)

Physical Characteristics

Dimension	- 160 (L) x 180 (W) x 83.5 (H) mm
Weight	- 620 g

Environmental Ratings and Certifications

Battery Charging Temperature	- 0°C ~ +45°C
Storage Temperature	- -40°C ~ +70°C
Certifications	- CE - FCC