

DOCKLITE

DLDS



- For DS Series only



- Designed for more connectivity possibilities and flexibilities.



Version: V1.0.1

- Specifications subject to change without notice.
- Copyright© 2023, MilDef Crete Inc. and MilDef Crete Australasia Pty Ltd.
- All rights reserved. No part of this publication may be reproduced and modified without the written permission of MilDef Crete Inc. and MilDef Crete Australasia Pty Ltd.
- All product and company names are trademarks or registered trademarks of their respective holders.

MilDef Crete Inc.

7 F, No. 250, Sec. 3, Pei Shen Rd., Shen Keng District, New Taipei City 22204, Taiwan (R.O.C.)
Tel: 866-2-2662-6074 Fax: 866-2-2664-2662

www.mildefcrete.com


MilDef Crete Australasia Pty Ltd

Level 5, 7 Eden Park Dr, Macquarie Park, NSW 2113, Australia.

Tel: +61 2 8527 2542

www.mildefcrete.com.au

Appearance

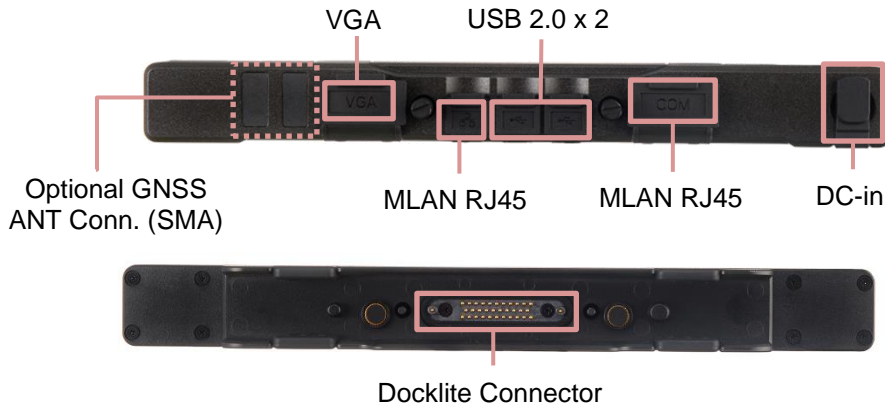

Operating Instruction



1. Align the tablet with Docklite.
2. Attach the Docklite.
3. Tighten the screws.

Features

External Ports

Connector ports (From left to right)

- Optional GNSS ANT Conn. (SMA)
- VGA DB15 x 1
- Optional GLAN RJ45 x 1
- USB 2.0 x 2
- DB9 x 1

Electronic characteristics (DC Input)

DC Input Range -12 ~ 32V

Physical Characteristics

Dimension - 280 (L) x 77 (W) x 30 (H) mm
Weight - Approx. 440g

Environmental Ratings and Certifications

Operating Temperature - 20°C ~ +55°C
Storage Temperature - -40°C ~ +70°C
Certifications - CE
- FCC