


# MULTI BATTERY CHARGER

# MCDK



- For DK Series Battery only
- Designed for charging 3 batteries (2 primary and 1 secondary), independently.

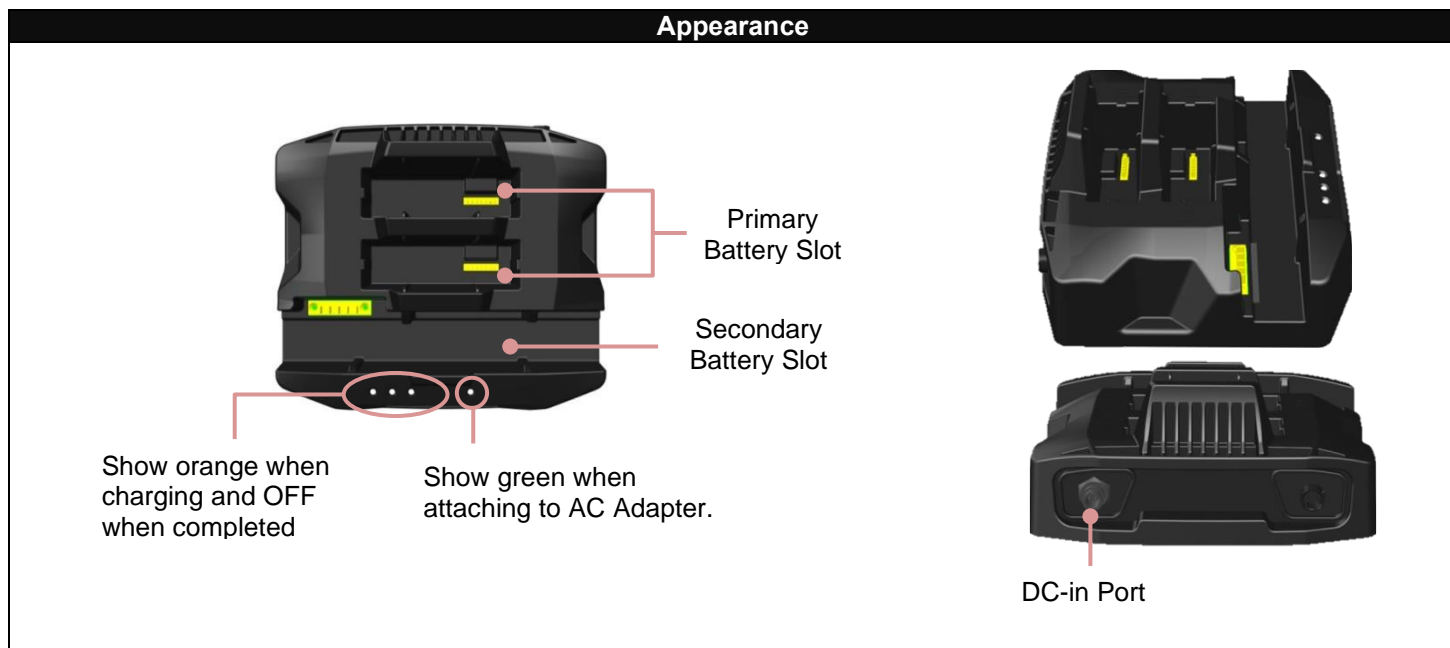

## Features

LED Indicators and Charging Ports	
Power Indicator	– Green (When attaching to AC Adapter)
Charge Indicator	– Orange/OFF (Charging/Completed)
Battery Slot	– Battery Charging Ports x 4 (Primary x 2 and Secondary x 1) – Applicable Batteries: Battery pack for DK Series

Electronic characteristics (DC Input)	
DC Input Range	– 12 ~ 32V with BVA
Charging Time	– Primary battery x1 : 5 hrs – Secondary battery x1 : 7 hrs – Primary battery x1 + Secondary battery x1 : 5~6 hrs – Primary battery x2 + Secondary battery x1 : 7~8 hrs (Each slot is independent, charging time won't accumulate. )

Physical Characteristics	
Dimension	– 160 (L) x 180 (W) x 83.5 (H) mm
Weight	– 620 g

Environmental Ratings and Certifications	
Battery Charging Temperature	– 0°C ~ +45°C
Storage Temperature	– -40°C ~ +70°C
Certifications	– CE – FCC