

# MULTI BATTERY CHARGER


# MCRK



- For RK Series Primary & Secondary Batteries only



- Two battery slots work independently to increase operating efficiency

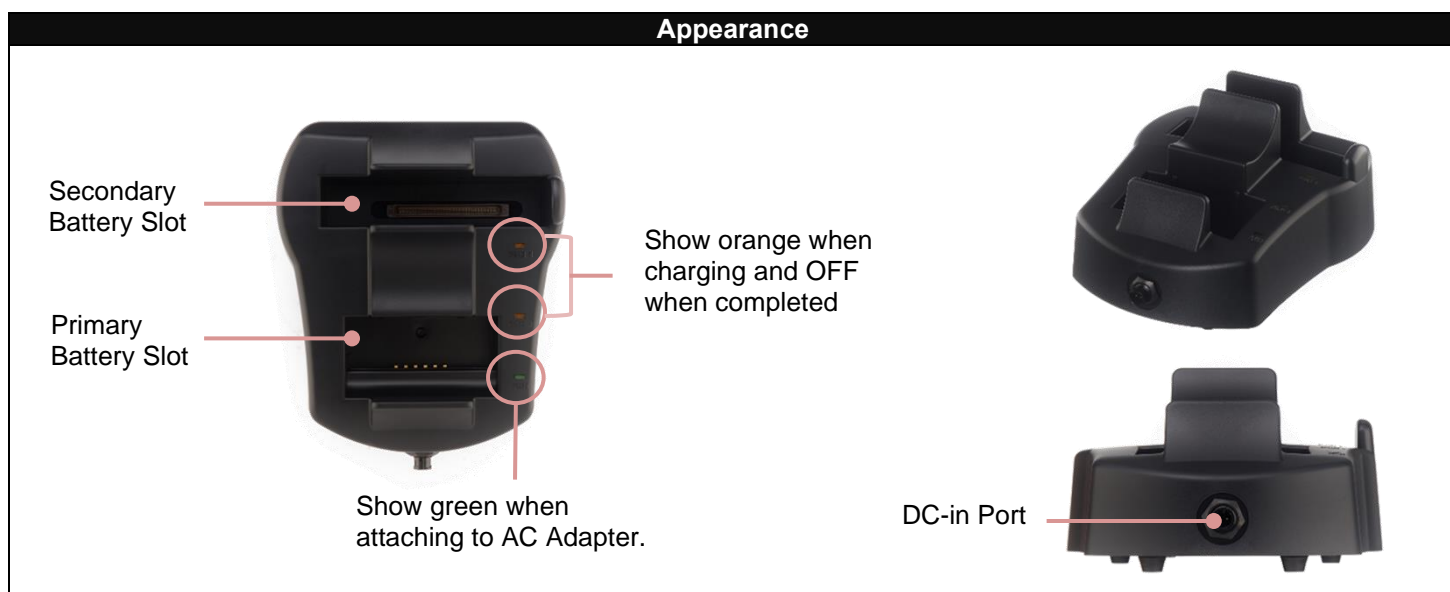

## Features

### LED Indicators and Charging Ports

<b>Power Indicator</b>	- Green (When attaching to AC Adapter)
<b>Charge Indicator</b>	- Orange/OFF (Charging/Completed)
<b>Battery Slot</b>	- Battery Charging Slots x 2 - Applicable Batteries: Primary and Secondary Battery Packs for RK Series

### Electronic Characteristics (DC Input)

<b>DC Input Range</b>	- 12 ~ 32V with BVA - 90W AC Adapter
<b>Charging Time</b>	- 5 hours (Each slot works independently, charging time won't accumulate)

### Physical Characteristics

<b>Dimension</b>	- 194 (L) x 151 (W) x 86 (H) mm
<b>Weight</b>	- 355g

### Environmental Ratings and Certifications

<b>Battery Charging Temperature</b>	- +10°C ~ +45°C
<b>Storage Temperature</b>	- -40°C ~ +70°C
<b>Certifications</b>	- CE - FCC