

SINGLE BATTERY CHARGER


SCDS



- For DS Series Battery only
- Designed with features including status indicators, secure DC-in Fischer connector, and BVA protection

SINGLE BATTERY CHARGER SCDS

Appearance

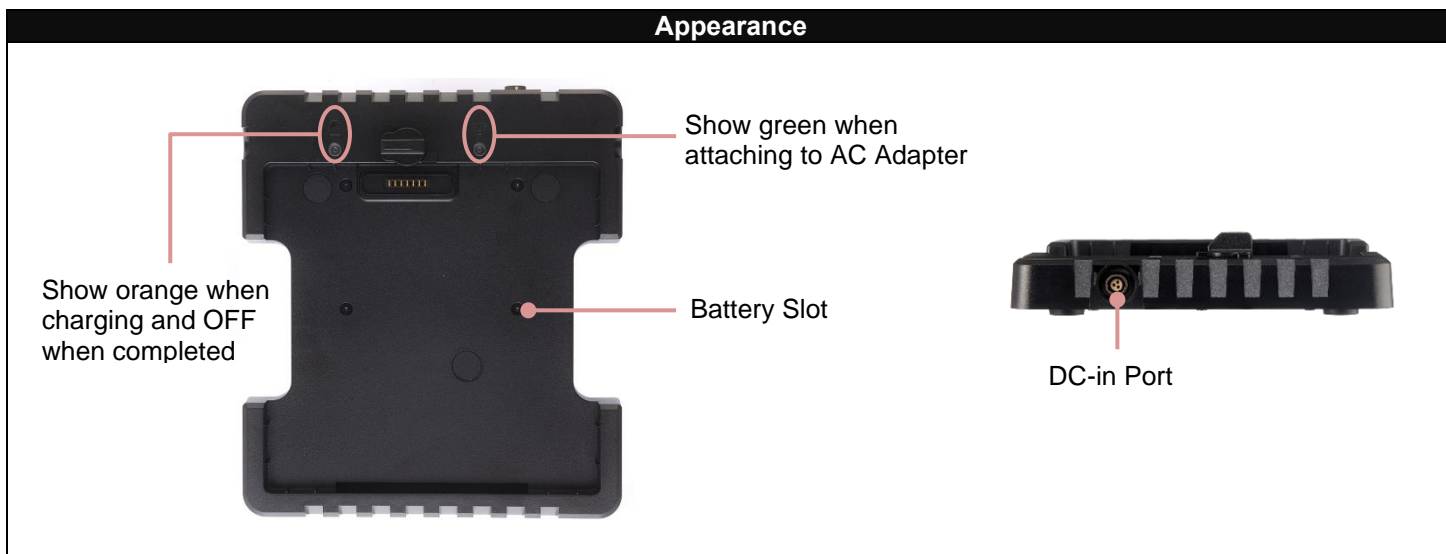

Features

LED Indicators and Charging Ports	
Power Indicator	– Green (When attaching to AC Adapter)
Charge Indicator	– Orange/OFF (Charging/Completed)
Battery Slot	– Battery Charging Slot x 1 – DS Standard Battery – DS Double-Capacity Battery

Electronic characteristics (DC Input)	
DC Input Range	– 12 ~ 32V with BVA
Charging Time	– 3 hours (Standard Battery) – 5 hours (Double Capacity Battery)

Physical Characteristics	
Dimension	– 180 (L) x 160 (W) x 35 (H) mm
Weight	– 321 g

Environmental Ratings and Certifications	
Battery Charging Temperature	– +10°C ~ +45°C
Storage Temperature	– -40°C ~ +70°C
Certifications	– CE – FCC